





Available Connections

Connection Size	Thread Profile	Outside Diameter (in)	Inside Diameter (in)
2 3/8	API REGULAR	3.250-3.500	1
2 7/8	API REGULAR	3.875	1.5
3 1/2	API REGULAR	4.500	2
4 1/2	API REGULAR	5.625-6.000	2.25
5 1/2	API REGULAR	6.652-7.500	2.75
6 5/8	API REGULAR	7.5-8.25	3.5
7 5/8	API REGULAR	8.625-9.5	4
8 5/8	API REGULAR	9.625-12	4.75
2 3/8	API INTERNAL FLUSH	3.375-3.875	1.5
2 7/8	API INTERNAL FLUSH	4.125-4.375	2
3 1/2	API INTERNAL FLUSH	4.750-5.250	2.5
4	API INTERNAL FLUSH	6-6.75	3
4 1/2	API INTERNAL FLUSH	6.250-7.250	3.75
5 1/2	API INTERNAL FLUSH	7.500-9.000	4.5
6 5/8	API INTERNAL FLUSH	9.000-10.500	4.75
6 5/8	API IF MODIFIED.	9.000-10.000	5.75
6 5/8	SMOOTH FLOW	9.000-10.000	5.75
3 1/2	API FULL HOLE	4.875-5.250	2.25
4	API FULL HOLE	5.250-5.750	2.5
4 1/2	API FULL HOLE	5.750-6.250	3
5 1/2	API FULL HOLE	6.875-8.00	4
6 5/8	API FULL HOLE	8.000-9.250	5
3	BECO	4.500-5.500	1.5
3 1/2	BECO	5.000-6.000	1.5
4	BECO	6.000-6.625	2
4 1/2	BECO	6.625-7.000	2.5
5 1/4	BECO	7.000-7.625	2.75
6	BECO	7.625-9.250	3
8	BECO	10.000-12.250	4.5
10	BECO	12.000-13.375	5.5
11	BECO	13.000-15.000	6
8 1/4	DI-22	10.000	5.5
9 3/4	DI-22	11.25	6.5
2 7/8	HUGHES XTRA HOLE	4.125-4.375	2
3 1/2	HUGHES XTRA HOLE	4.750-5.000	2.25
4 1/2	HUGHES XTRA HOLE	6.000-6.750	3
5	HUGHES XTRA HOLE	6.250-7.250	3.25
3 1/2	HUGHES H-90	5.000-5.500	2.5
4	HUGHES H-91	5.500-6.000	2.75
4 1/2	HUGHES H-92	6.00-6.500	3
5	HUGHES H-93	6.500-7.000	3.25

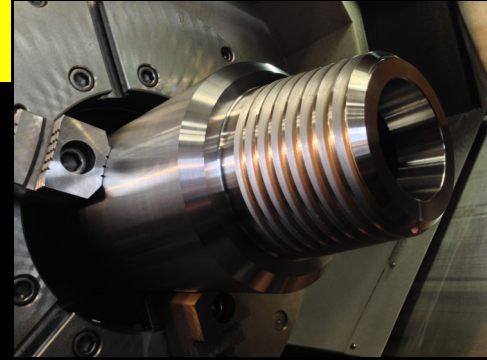

FIRST SOURCE IN
DRILL PIPE
DRILL TOOLS,
BITS,
REPAIR
FABRICATION,
AND
MANUFACTURING.

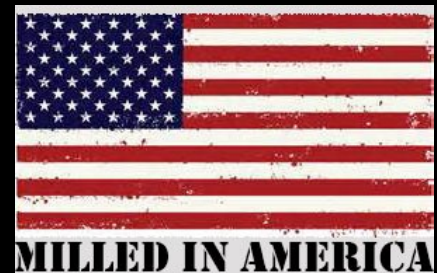

Connection Size	Thread Profile	Outside Diameter (in)	Inside Diameter (in)
-----------------	----------------	-----------------------	----------------------



CALL | 970.858.1175

www.copelandsupply.com

1882 Hwy 6 & 50 Fruita ,CO

5 1/2	HUGHES H-94	6.750-7.50	3.25
6 5/8	HUGHES H-95	7.625-8.250	3.5
7	HUGHES H-96	8.250-8.500	3.75
7 5/8	HUGHES H-97	9.750-10.250	4.25
8 5/8	HUGHES H-98	10.75-11.500	4.75
2 3/8	EXTERNAL FLUSH	3.000-3.500	1
2 7/8	EXTERNAL FLUSH	3.500-4.000	1
3 1/2	EXTERNAL FLUSH	4.00-4.750	1.5
4 1/2	EXTERNAL FLUSH	4.75-5.250	2
2 3/8	HUGHES SLIM HOLE	3.125	1
2 7/8	HUGHES SLIM HOLE	3.375-3.875	1.5
3 1/2	HUGHES SLIM HOLE	4.125-4.375	2
4	HUGHES SLIM HOLE	4.750-5.000	2.25
4 1/2	HUGHES SLIM HOLE	4.750-5.250	2.5
3 1/2	Hughes Double Streamline	4.125-4.375	1.5
4	Hughes Double Streamline	4.625-4.5	2.25
4 1/2	Hughes Double Streamline	5.250-5.750	2.5
5 1/2	Hughes Double Streamline	6.250-7.250	3
2 3/8	HUGHES ACME REGULAR	3.25	1
2 7/8	HUGHES ACME REGULAR	3.75	1.5
3 1/2	HUGHES ACME REGULAR	4.375	1.5
4 1/2	HUGHES ACME REGULAR	5.500-5.750	2.25
5 1/2	HUGHES ACME REGULAR	6.625-7.375	3
6 5/8	HUGHES ACME REGULAR	7.625-8.500	3.5
2 3/8	HUGHES ACME STREAMLINE	3.375	1
2 7/8	HUGHES ACME STREAMLINE	4.125	1.5
3 1/2	HUGHES ACME STREAMLINE	4.75	2
4 1/2	HUGHES ACME STREAMLINE	5.750-6.125	2.75
5 1/2	HUGHES ACME STREAMLINE	6.875-7.875	3
2 3/8	HUGHES SLIMLINE H-90	3.25	1.5
2 7/8	HUGHES SLIMLINE H-91	4.125-4.250	2
3 1/2	HUGHES SLIMLINE H-92	4.875-5.000	2.75
2 3/8	AMERICAN P.A.C.	2.750-3.000	1
2 7/8	AMERICAN P.A.C.	3.125	1.5
2 3/8	AMERICAN OPEN HOLE	3.125	1.5
2 7/8	AMERICAN OPEN HOLE	3.750-4.250	2
23	API NUMBERED CONNECTIONS	3.125	1
26	API NUMBERED CONNECTIONS	3.375-3.875	1.5
31	API NUMBERED CONNECTIONS	4.125-4.375	2
35	API NUMBERED CONNECTIONS	4.375	2.25
38	API NUMBERED CONNECTIONS	4.375-5.250	2.5
40	API NUMBERED CONNECTIONS	5.250-5.750	2.5
44	API NUMBERED CONNECTIONS	5.750-6.250	2.75
46	API NUMBERED CONNECTIONS	6.00-6.750	3
50	API NUMBERED CONNECTIONS	6.250-7.250	3.25
56	API NUMBERED CONNECTIONS	7.500-8.000	3.25
61	API NUMBERED CONNECTIONS	8.250-9.000	3.5
70	API NUMBERED CONNECTIONS	9.50-10.000	4.125
77	API NUMBERED CONNECTIONS	11	4.25

FIRST SOURCE IN

DRILL PIPE

DRILL TOOLS,

BITS,

REPAIR

FABRICATION,

AND

MANUFACTURING.

